

N6119Z

Intel® 赛扬 J 系列 处理器、全铝合金机箱、支持个1串口及高清HD OUTPUT+VGA独立



Product characteristics

- fanless structure, all aluminum alloy chassis
- Integrated Intel® Celeron J1900 quad-core, four-thread processor
- Support 1* HD OUTPUT display output and 1*VGA display output
- Support 2* Realtek Gigabit NIC chip, support network wake up /PXE function
- Support 1* standard COM interface
- Support 5* USB2.0 interface, 1* USB3.0 interface

规格

Processor system	CPU	Integrated Intel® Celeron J1900 quad-core, quad-thread processor
	Dominant frequency	2.00GHz~2.42GHz (MAX)
	power	TDP 10W
	System chip	Based on Intel® Bay trail SOC platform
	BIOS	64Mb Flash ROM
Internal memory	technology	DDR3L 1600/1333MHz
	Maximum capacity	8GB
	Sockets	1*SODIMM DDRIII
reveal	chipset	Intel®HD Graphics
	Graphics engine	DirectX 11.1, OpenGL 3.2
	HD OUTPUT	1*HD OUTPUT, 1920X1080@60HZ
	CRT	1*VGA, 2560X1600@60Hz
	Independent dual display	1*HD OUTPUT 1*VGA




NANO准系统

Ethernet	LAN1	1* Realtek RTL8111F Gigabit NIC chip, supports network wake up /PXE function
	LAN2	1* Realtek RTL8111F Gigabit NIC chip, supports network wake up /PXE function
Audio frequency	port	1*AUDIO interface, 1*MIC interface, onboard ALC662 6-channel hi-fi audio controller
I/O interface	Serial interface	1* standard RS232 serial interface
	USB	5 x USB2.0 port, 1 x USB3.0 port
	SIM	N/A
	Phoenix terminal	N/A
extend	Mini PCIE	The 1* Mini PCIE slot supports the WIFI/3G module
store	SATA	1 x 2.5-inch hard disk expansion
	Solid-state disk	1* MSATA SSD disk connection, SSD transmission speed up to 3Gbps
Software support	Microsoft Windows	Windows 7/Windows 10 64-bit (without key)
	Linux	Ubuntu
Power demand	Power supply type	External power adapter
	Voltage input	DC 12V
	Power output	AC TO DC, 36W / 60W (optional)
machine	structure	All aluminum alloy material, no fan cooling
	Install	Desktop or wall type
	Dimensions (length, width and height)	165mm*128mm*41mm
environment	Operating temperature	-10℃ to 60℃


	Storage temperature	-20°C to 70°C
	Relative humidity	5%-95% relative humidity, no condensation
	Working vibration	0.5g rms/5-500HZ/random/operating

N6119Z


尺寸图

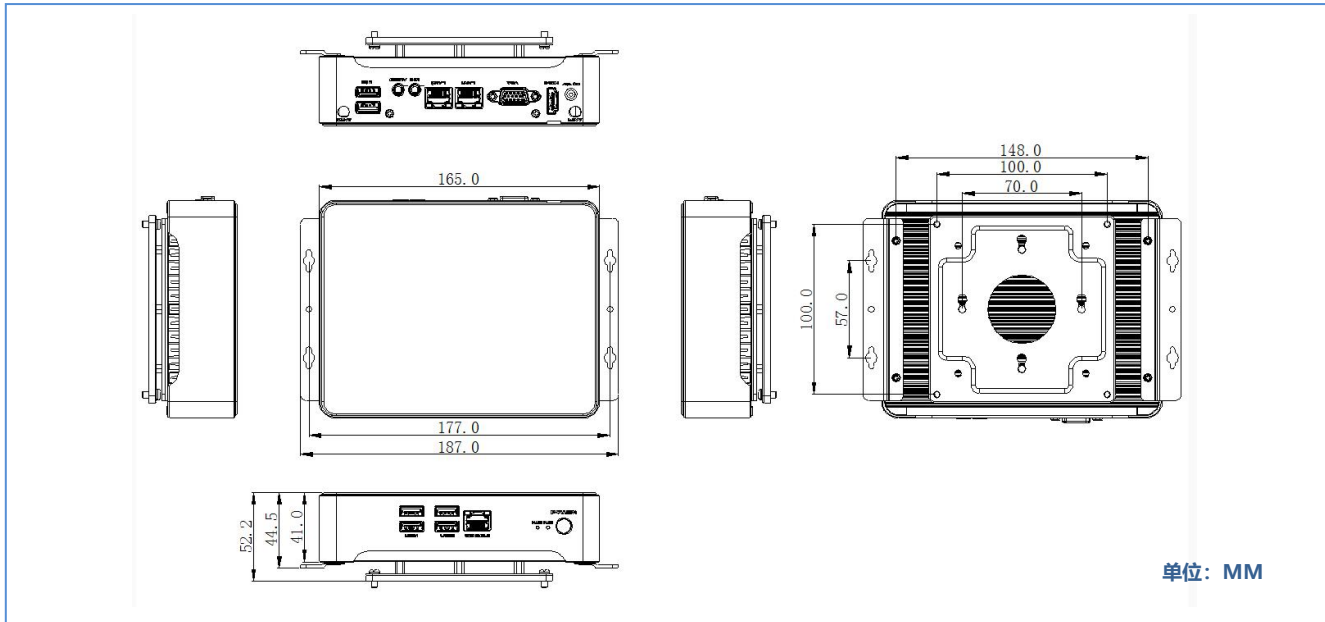

前面板外置I/O视图

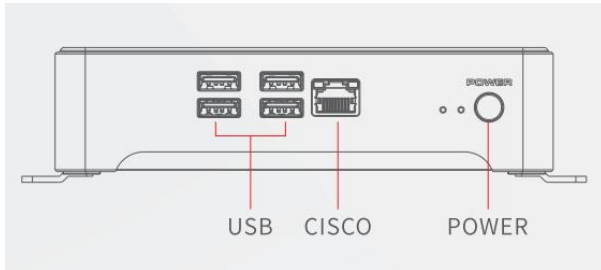

后面板外置I/O视图

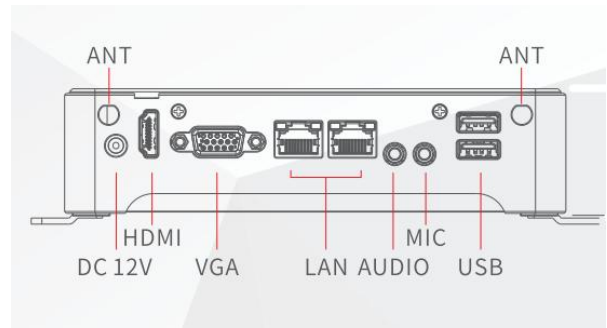

订货信息

No.	Model	Processor	Motherboard	Memory	HDD	GPIO	LAN	COM	HD	VGA	USB2.0	USB3.0	SIM	power-input
1	N6119Z	J1900/2.00GHz	N39_19	N/A	N/A	N/A	2	1	1	1	5	1	N/A	DC 12V
2	N61C3Z	3855U/1.6G	N61_C321E	N/A	N/A	N/A	2	1	1	1	4	2	N/A	DC 12V
3	N6163Z	6100U/2.3GHz	N61_I321E	N/A	N/A	N/A	2	1	1	1	4	2	N/A	DC 12V
4	N9243Z	I3-4005U/1.7G	N92_I3	N/A	N/A	N/A	2	1	1	1	4	2	N/A	DC 12V
5	N9247Z	I7-4500U/1.8G	N92_I7	N/A	N/A	N/A	2	1	1	1	4	2	N/A	DC 12V
6	N35C3Z	3855U/1.6G	N35_38	N/A	N/A	N/A	2	1	1	1	4	2	N/A	DC 12V
7	N6125YZ	I5-4210Y/1.5G	N92_I5	N/A	N/A	N/A	2	1	1	1	4	2	N/A	DC 12V

配件清单

序号	料号	描述	数量	单位	备注
1	03.02.N05-B0039-00	黑色壁挂固定板 110*110*4.5mm T=0.8, 配送8颗螺丝	1	Set	可选
2	03.01.DC0-KPL60-50	电源适配器 KPL-060F DC12V/5A 1185# 16 1200mm 5.5*2.5*12L 黑色	1	pcs	可选
3	03.03.J01-0H015-00	国标电源线 L=1.5m 品字尾	1	pcs	可选
4	03.01.DC0-H12V3-00	航嘉 DC12V_3A 适配器 (黑色)	1	pcs	可选