

# R41EUZ

Intel® Celeron Processor  
1U standard firewall pc



## Product Features

- Integrated Intel® Celeron J4125 2.0GHz quad-core quad-thread processor
- 1\* SODIMM slot, support single channel 2400MHz DDR4 memory, maximum support 8GB
- Support 1\*VGA interface display output
- 4\* Intel I211 Gigabit LAN, support Wake-on-LAN/PXE function
- Support 1\* standard RS232 serial interface
- Support 2\*USB2.0 interface
- 1U standard chassis, high quality galvanized steel

model	R41EUZ		
Chassis	Material/Structure	1U standard chassis, high quality galvanized steel	
	color	Asian silver black	
	Size (length, width and height)	430mm*250.2mm*46mm	
	Install	1U standard rack	
motherboard	CPU	Integrated Intel® Celeron J4125 2.0GHz quad-core quad-thread processor, TDP 10W, Compatible with all Intel® Gemini Lake CPUs	
	system chip	SOC	
	Display	Integrated Intel® UHD Graphics 600 Core Graphics	
	Memory	1* SODIMM slot, support single channel 2400MHz DDR4 memory, maximum support 8GB	
Front interface	panel	POWER	1*Power switch
		LAN	4* Intel I211 Gigabit LAN, support Wake-on-LAN/PXE function
		COM	1* standard RS232 serial interface
		USB	2* USB2.0 interface
		led	1* power indicator, 1* hard disk indicator
rear interface	panel	display interface	1*VGA interface
		power supply	1* AC power connector
storage	SATA	1*2.5 inch hard drive expansion	
	SSD	1* MSATA SSD solid state drive expansion, SSD transfer speed up to 3Gbps	
expand	Mini PCIE	1* Mini-PCIE slot, support WIFI, 4G module, default is USB signal, Note: Mini-PCIE slot and LAN4 share PCIE channel, user can choose one	
software support	Microsoft Windows	Windows 7/10, 64bit (without key)	
	Linux	Ubuntu	
	Watch Dog	Support hardware reset function (256 levels, 0~255 seconds)	
power requirements	Power Type	External open power supply	
	Voltage input	AC 110~220V	
	power output	AC TO DC, 60W	
surroundings	Operating temperature	-10℃~60℃	




软路由准系统


所有产品规格变更, 均不另行通知

storage temperature	-20℃~70℃
Relative humidity	5%-95% relative humidity, no condensation
work vibration	0.5g rms/5-500HZ/random/operating


## 尺寸图

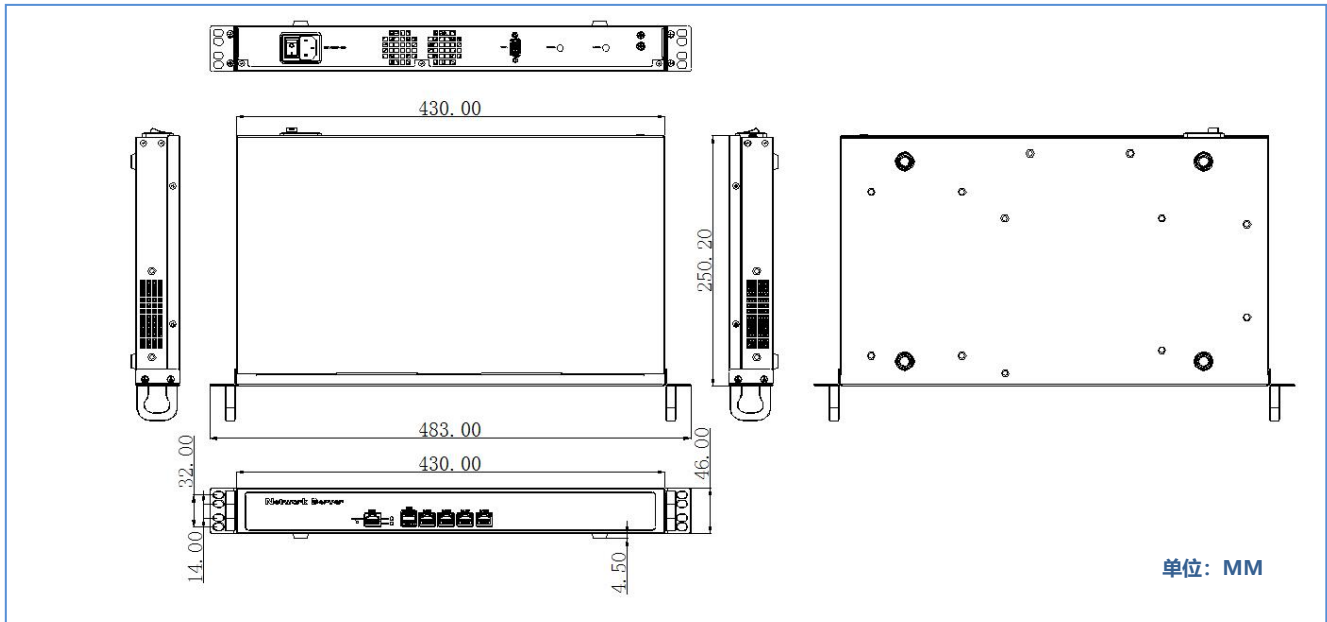

前面板外置I/O视图

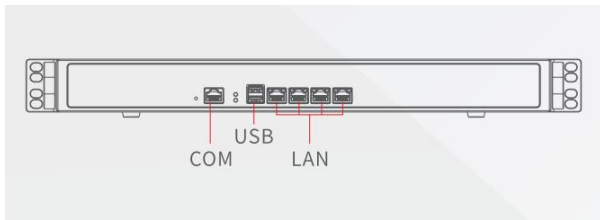

后面板外置I/O视图

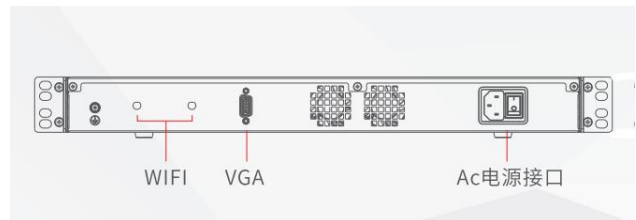

## 订货信息

No.	Model	Processor	Motherboard	Memory	LAN	COM	HD OUTPUT	VGA	USB2.0	USB3.0	SIM	power-input
1	R9FUZ V1.0(J1900)	J1900/2.0GHz	M9F	1*SODDR3L	4* 82583V	1	N/A	1	2	N/A	N/A	1U standard power supply
2	R9EUZ V1.0(J1900)	J1900/2.0GHz	M9E	1*SODDR3L	4*1211	1	N/A	1	2	N/A	N/A	1U standard power supply
3	R41EUZ V1.0(J4125)	J4125 /2.0GHz	M41E	1*DDR4	4*1211	1	N/A	1	2	N/A	N/A	1U standard power supply
4	R41VUZ V1.0(J4125)	J4125 /2.0GHz	M41V	1*DDR4	4*1225V	1	N/A	1	2	N/A	N/A	1U standard power supply